

HONDA
The Power of Dreams



uni-power

ENGINES • TRANSMISSIONS • PARTS

TEL: 01371 875331 www.uni-power.co.uk

www.honda-engines-eu.com

ENGINE
POCKET
GUIDE
2019
2020

Engine Pocket Guide Content



GXH50	06	iGX	15	GX25	28
GXR120	06	iGX270	16	GX35	28
GX120	06	iGX390	16	GX50	28
GX100 RAMMER	08	GX630	18	GX25 DIGITAL CDI	30
GXR120 RAMMER	08	GX690	18	GXV50	30
GX160	10	iGX700	20	GXV57	30
GX200	10	iGX800	20	GXV160	32
GX240	10	GP160	22	GXV390	32
GX270	12	GP200	22	GXV630	34
GX340	12	GCVx	24	GXV690	34
GX390	12	GCVx145	26	iGXV700	37
High inclination Engines	14	GCVx170	26	iGXV800	37
		GCVx200	26		

Engine List	Net power			Max. net torque		
	kW	HP	@ rpm	Nm	kgfm	@ rpm
GXH50	1.6	2.1	7000	2.7	0.28	4500
GXR120	2.3	3.1	3600	6.3	0.64	3000
GX120	2.4	3.2	3600	7.5	0.76	2500
GX100 RAMMER	2.1	2.8	3600	5.7	0.58	3600
GXR120 RAMMER	2.7	3.6	3600	7.5	0.76	2500
GX160	3.6	4.8	3600	10.3	1.05	2500
GX200	4.3	5.8	3600	12.4	1.26	2500
GX240	5.9	7.9	3600	18.3	1.86	2500
GX270	6.3	8.4	3600	19.1	1.94	2500
GX340	8.0	10.7	3600	26.4	2.70	2500
GX390	8.7	11.7	3600	26.5	2.70	2500
iGX270	6.3	8.4	3600	19.1	1.94	2500
iGX390	8.7	11.7	3600	26.5	2.70	2500
GX630	15.5	20.8	3600	48.3	4.93	2500
GX690	16.5	22.1	3600	48.3	4.93	2500
iGX700	16.5	22.1	3600	48.3	4.93	2500
iGX800	18.5	24.8	3600	54.5	5.56	2500

GP160	3.6	4.8	3600	10.3	1.05	2500
GP200	4.3	5.8	3600	12.4	1.26	2500
GCVx145	3.1	4.2	3600	9.1	0.93	2500
GCVx170	3.6	4.8	3600	11.1	1.13	2500
GCVx200	4.2	5.6	3600	12.7	1.30	2500
GX25	0.72	1.0	7000	1.0	0.10	5000
GX35	1.0	1.3	7000	1.6	0.16	5500
GX50	1.47	2.0	7000	2.2	0.22	5000
GX25 DIGITAL CDI	0.61	0.82	6000	1.0	0.10	5000
GXV50	1.6	2.1	7000	2.7	0.28	4500
GXV57	1.5	2.0	4800	3.2	0.33	4000
GXV160	3.2	4.3	3600	9.6	0.98	2500
GXV390	7.6	10.2	3600	24.2	2.47	2500
GXV630	15.5	20.8	3600	48.3	4.93	2500
GXV690	16.5	22.1	3600	48.3	4.93	2500
iGXV700	16.5	22.1	3600	48.3	4.93	2500
iGXV800	18.5	24.8	3600	54.5	5.56	2500

The power rating of the engine indicated in this document is the net power tested on a production engine for the engine model and measured in accordance with SAE J1349 at a specified rpm. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the operating speed of the engine in application, environmental conditions, maintenance, and other variables. In the interests of continuous product improvement, HONDA reserves the right to modify its specifications at any time and without notice. For your safety and optimum performance of the device, we strongly recommend reading the user's manual. Non-contractual documents and photographs.

GX

SUITABLE FOR MULTIPURPOSE PROFESSIONAL HEAVY DUTY APPLICATIONS

- **Strong:** professional heavy duty configuration
- **Powerful:** high power to displacement ratio
- **Long life:** all components are designed for long term use
- **Reliable:** all components are purpose-built
- **Easy to start:** unique Honda technology
- **Environmentally friendly**



GP


SUITABLE FOR LIGHT DUTY APPLICATIONS

- **Powerful:** high power to displacement ratio
- **Reliable:** all components are purpose-built
- **Easy to start:** unique Honda technology
- **Environmentally friendly**



M4 | SUITABLE TO REPLACE 2-STROKE PROFESSIONAL ENGINES

- World's first fully 360° inclinable 4-stroke engine for operation in any position (GX25 - GX35 - GX50)
- High power to weight ratio
- Easy starting, low noise and superb acceleration
- Low vibration
- High silicon aluminium die-cast sleeveless cylinder
- High hardness piston coat
- Environmentally friendly



GXV

SUITABLE FOR
LAWN AND GARDEN
PROFESSIONAL HEAVY DUTY
APPLICATIONS

- **Strong:** professional heavy duty configuration
- **Powerful:** high power to displacement ratio
- **Long life:** all components are designed for long term use
- **Reliable:** all components are purpose-built
- **Easy to start:** unique Honda technology
- **Environmentally friendly**



GCVx

SUITABLE FOR
LAWN AND GARDEN
HOME USE APPLICATIONS

- **Innovative:** design & styling
- **Quiet:** new muffler structure & resin muffler protector
- **Powerful:** larger engine displacements with compact design offer superior torque for better cutting and collection
- **Reliable:** enhanced Auto Choke System (ACS) due to optimised location of the wax element and simplified structure
- **Easy maintenance:** smart engine layout
- **Clean engine technology**



Specifications

GXH50



4-Stroke single cylinder
OHV petrol engine
horizontal shaft

Aluminium cylinder

49 cm³

0.91 L/h - 7000 rpm

225 x 276 x 353 mm

5.5 kg

GXR120



4-Stroke single cylinder
OHC petrol engine
horizontal shaft

Cast iron sleeve

121 cm³

0.97 L/h - 3600 rpm

287 x 304 x 418 mm

11.0 kg

GX120



4-stroke single cylinder
OHV petrol engine
horizontal shaft

Cast iron sleeve

122 cm³

1.0 L/h - 3600 rpm

305 x 346 x 333 mm

13.2 kg

Engine type

Cylinder sleeve type

Displacement

Fuel cons. at cont.
rated power

Dimensions (L x W x H)

Dry weight

Net power

1.6 kW (2.1 HP) / 7000 rpm

2.3 kW (3.1 HP) / 3600 rpm

2.4 kW (3.2 HP) / 3600 rpm

Cont. rated power

1.6 kW (2.2 HP) / 3000 rpm

1.8 kW (2.4 HP) / 3600 rpm

1.8 kW (2.4 HP) / 3000 rpm

2.1 kW (2.8 HP) / 3600 rpm




Max. net torque

2.7 Nm / 0.28 kgfm / 4500 rpm

6.3 Nm / 0.64 kgfm / 3000 rpm

7.5 Nm / 0.76 kgfm / 2500 rpm

Power curve

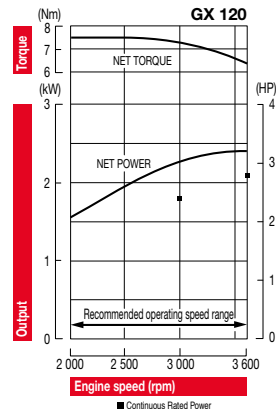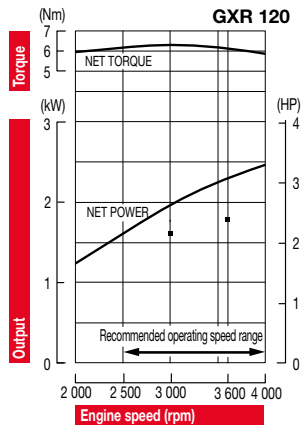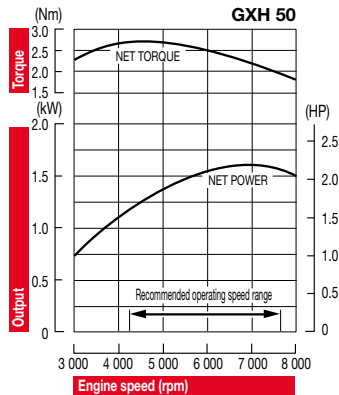

GX

Specifications

GX100 RAMMER



4-stroke single cylinder
OHC petrol engine
horizontal shaft

Cast iron sleeve

98 cm³

0.88 L/h - 3600 rpm

254 x 316 x 290 mm*

10.7 kg (rammer type 50kg)
10.8 kg (rammer type 60kg)

GXR120 RAMMER



4-stroke single cylinder
OHC petrol engine
horizontal shaft

Cast iron sleeve

121 cm³

1.0 L/h - 3600 rpm

259 x 294 x 290 mm*

10.9 kg (rammer type 50kg)
11.0 kg (rammer type 60kg)

Engine type

Cylinder sleeve type

Displacement

Fuel cons. at cont.
rated power

Dimensions (L x W x H)

Dry weight



Net power

Cont. rated power

Max. net torque

Power curve

2.1 kW (2.8 HP) / 3600 rpm


1.7 kW (2.3 HP) / 3600 rpm

5.7 Nm / 0.58 kgfm / 3600 rpm


2.7 kW (3.6 HP) / 3600 rpm

2.1 kW (2.8 HP) / 3600 rpm

7.5 Nm / 0.76 kgfm / 2500 rpm

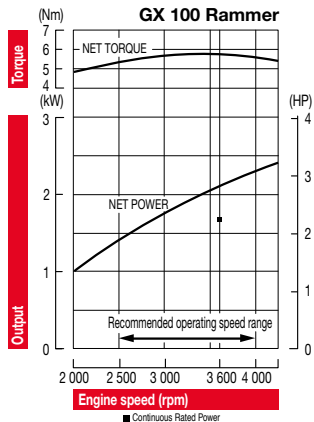

*without flange

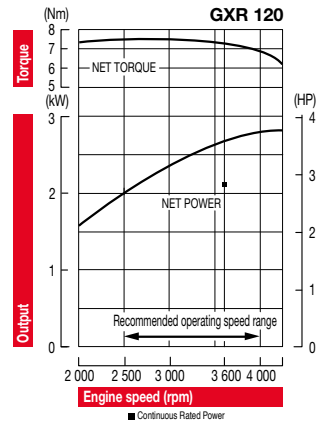

*without flange



GX

Specifications

GX160



4-stroke single cylinder
OHV petrol engine
horizontal shaft

Cast iron sleeve

163 cm³

1.4 L/h - 3600 rpm

312 x 362 x 346 mm

15.1 kg

GX200



4-stroke single cylinder
OHV petrol engine
horizontal shaft

Cast iron sleeve

196 cm³

1.7 L/h - 3600 rpm

321 x 376 x 346 mm

16.1 kg

GX240



4-stroke single cylinder
OHV petrol engine
horizontal shaft

Cast iron sleeve

270 cm³

2.2 L/h - 3600 rpm

381 x 428 x 422 mm

25.8 kg

Engine type

Cylinder sleeve type

Displacement

**Fuel cons. at cont.
rated power**

Dimensions (L x W x H)

Dry weight

Net power

3.6 kW (4.8 HP) / 3600 rpm

4.3 kW (5.8 HP) / 3600 rpm

5.9 kW (7.9 HP) / 3600 rpm

Cont. rated power

2.5 kW (3.4 HP) / 3000 rpm

2.9 kW (3.9 HP) / 3600 rpm

3.3 kW (4.4 HP) / 3000 rpm

3.7 kW (5.0 HP) / 3600 rpm

4.1 kW (5.5 HP) / 3000 rpm

4.6 kW (6.1 HP) / 3600 rpm




Max. net torque

10.3 Nm / 1.05 kgfm / 2500 rpm

12.4 Nm / 1.26 kgfm / 2500 rpm

18.3 Nm / 1.86 kgfm / 2500 rpm

Power curve

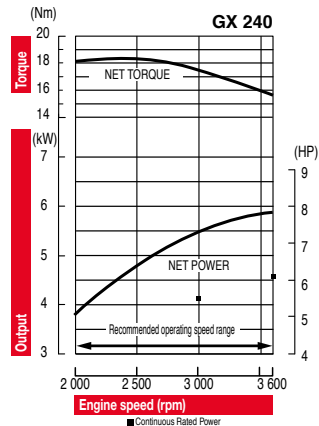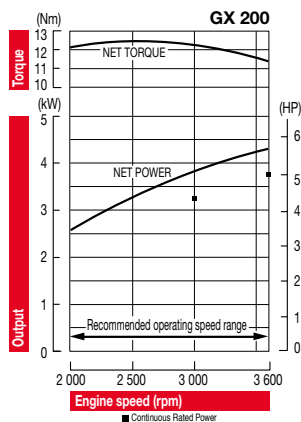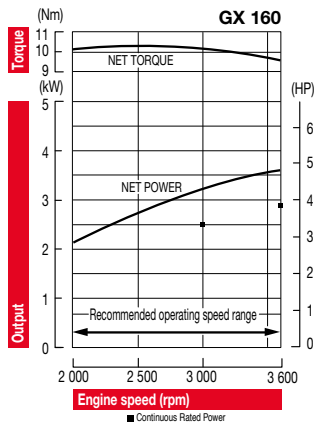

GX

Specifications

GX270



4-stroke single cylinder
OHV petrol engine
horizontal shaft

Cast iron sleeve

270 cm³

2.4 L/h - 3600 rpm

381 x 428 x 422 mm

25.8 kg

GX340



4-stroke single cylinder
OHV petrol engine
horizontal shaft

Cast iron sleeve

389 cm³

3.1 L/h - 3600 rpm

406 x 460 x 448 mm

31.7 kg

GX390



4-stroke single cylinder
OHV petrol engine
horizontal shaft

Cast iron sleeve

389 cm³

3.5 L/h - 3600 rpm

406 x 460 x 448 mm

31.7 kg

Engine type

Cylinder sleeve type

Displacement

Fuel cons. at cont.
rated power

Dimensions (L x W x H)

Dry weight

Net power

Cont. rated power

Max. net torque

Power curve

6.3 kW (8.4 HP) / 3600 rpm

8.0 kW (10.7 HP) / 3600 rpm

8.7 kW (11.7 HP) / 3600 rpm

4.6 kW (6.2 HP) / 3000 rpm

5.6 kW (7.5 HP) / 3000 rpm

6.4 kW (8.6 HP) / 3000 rpm

5.1 kW (6.8 HP) / 3600 rpm




6.3 kW (8.4 HP) / 3600 rpm

7.0 kW (9.4 HP) / 3600 rpm

19.1 Nm / 1.94 kgfm / 2500 rpm

26.4 Nm / 2.7 kgfm / 2500 rpm

26.5 Nm / 2.7 kgfm / 2500 rpm

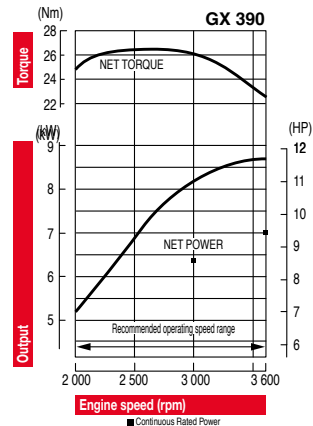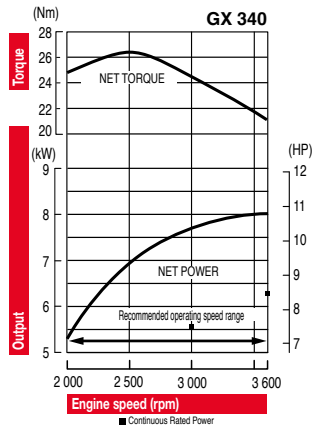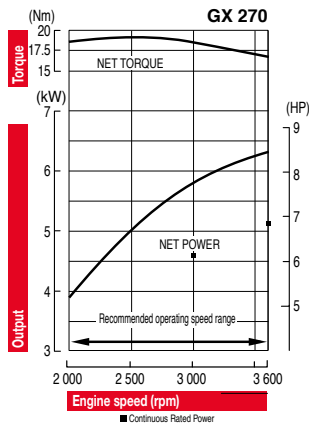

GX


‘High inclination’ engines

Three GX models, the GX270, the GX340 and GX390 are now available for multi-purpose uses including providing power for two-wheel tractors. The engines have new and unique features, to guarantee the best performance in the most severe working conditions, such as:

- A special one-way valve integrated in the cylinder head to improve the oil return flow and guarantee optimal lubrication;
- A membrane fuel pump, protected by a bracket, and adapted fuel line routing, to ensure an optimal fuel flow;
- A maximum fuel level indicator and inner-vent carburettor fitted to avoid overfilling and to guarantee safe operation under all conditions.

High **inclination**
High **reliability**
High **performance**



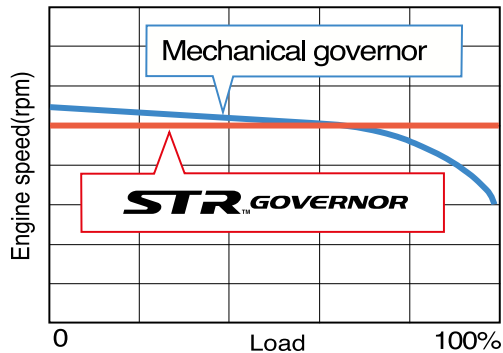

* STR = Self Tuning Regulator

Equipped with **STR** GOVERNOR

Intelligent with STR governor

- Electronic governor system to keep the engine RPM stable under changing loads
- Different engine speed characteristics are available pre-programmed from factory:
 - Auto-idle
 - Fixed RPM switch mode
 - Variable RPM mode

Ease of use

- Full automatic choke even without battery
- Remote operation possible
- Air-cleaner made of new material for longer maintenance intervals

Environmental performance

- Further reduced operating noise and lower fuel consumption
- The whole iGX range meets the most stringent environmental standards

Specifications

iGX270



4-stroke single cylinder
OHV petrol engine
horizontal shaft

Cast iron sleeve

270 cm³

2.4 L/h - 3600 rpm

383 x 462 x 422 mm

32 kg

iGX390



4-stroke single cylinder
OHV petrol engine
horizontal shaft

Cast iron sleeve

389 cm³

3.5 L/h - 3600 rpm

409 x 484 x 448 mm

37 kg

Engine type

Cylinder sleeve type

Displacement

Fuel cons. at cont.
rated power

Dimensions (L x W x H)

Dry weight

equipped with
STRTM GOVERNOR

Net power

6.3 kW (8.4 HP) / 3600 rpm

8.7 kW (11.7 HP) / 3600 rpm

Cont. rated power

4.6 kW (6.2 HP) / 3000 rpm

6.4 kW (8.6 HP) / 3000 rpm

5.1 kW (6.8 HP) / 3600 rpm



7.0 kW (9.4 HP) / 3600 rpm

Max. net torque

19.1 Nm / 1.94 kgfm / 2500 rpm

26.5 Nm / 2.7 kgfm / 2500 rpm

Power curve

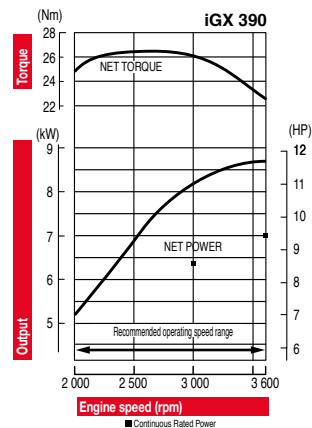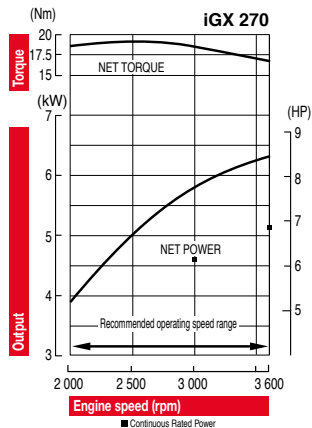

Specifications

GX630



4-stroke 2-cylinder
OHV petrol engine
horizontal shaft

Cast iron sleeve

688 cm³

6.0 L/h - 3600 rpm

405 x 410 x 438 mm

44.4 kg

GX690



4-stroke 2-cylinder
OHV petrol engine
horizontal shaft

Cast iron sleeve

688 cm³

6.7 L/h - 3600 rpm

429 x 410 x 438 mm (T-Type)

44.6 kg

Engine type

Cylinder sleeve type

Displacement

Fuel cons. at cont.
rated power

Dimensions (L x W x H)

Dry weight

Net power

Cont. rated power

Max. net torque

Power curve

15.5 kW (20.8 HP) / 3600 rpm

10.5 kW (14.1 HP) / 3000 rpm

12.0 kW (16.1 HP) / 3600 rpm



48.3 Nm / 4.93 kgfm / 2500 rpm

16.5 kW (22.1 HP) / 3600 rpm

11.5 kW (15.4 HP) / 3000 rpm

13.0 kW (17.4 HP) / 3600 rpm

48.3 Nm / 4.93 kgfm / 2500 rpm

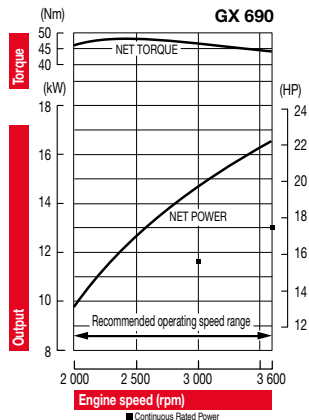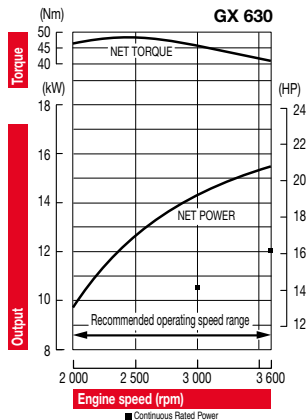

GX

Specifications*

iGX700



4-stroke 2-cylinder
OHV petrol engine
horizontal shaft
Electronic fuel injection

Cast iron sleeve

688 cm³

6.6 L/h - 3600 rpm

429 x 483 x 438 mm (T-Type)

47.5 kg

iGX800



4-stroke 2-cylinder
OHV petrol engine
horizontal shaft
Electronic fuel injection

Cast iron sleeve

779 cm³

6.9 L/h - 3600 rpm

429 x 492 x 438 mm (T-Type)

48.2 kg

Engine type

Fuel system

Cylinder sleeve type

Displacement

Fuel cons. at cont.
rated power

Dimensions (L x W x H)

Dry weight

equipped with
STRTM GOVERNOR

Net power

16.5 kW (22.1 HP) / 3600 rpm

18.5 kW (24.8 HP) / 3600 rpm

Cont. rated power

11.5 kW (15.4 HP) / 3000 rpm

13.3 kW (17.8 HP) / 3000 rpm

13.0 kW (17.4 HP) / 3600 rpm



15.0 kW (20.1 HP) / 3600 rpm

Max. net torque

48.3 Nm / 4.93 kgfm / 2500 rpm

54.5 Nm / 5.56 kgfm / 2500 rpm

Power curve

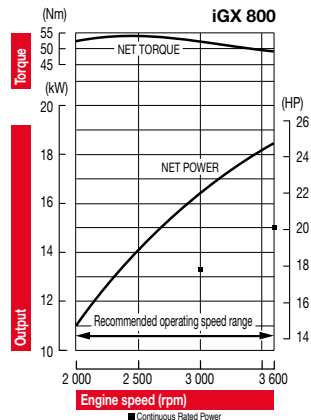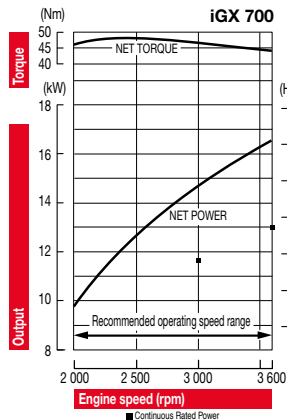

*subject to change

iGX

Specifications

GP160



4-stroke single cylinder
OHV petrol engine
horizontal shaft

Cast iron sleeve

163 cm³

1.4 L/h - 3600 rpm

314 x 363 x 335 mm

15.1 kg

GP200



4-stroke single cylinder
OHV petrol engine
horizontal shaft

Cast iron sleeve

196 cm³

1.7 L/h - 3600 rpm

323 x 378 x 335 mm

16.1 kg

Engine type

Cylinder sleeve type

Displacement

Fuel cons. at cont.
rated power

Dimensions (L x W x H)

Dry weight

Net power

Cont. rated power

Max. net torque

Power curve

3.6 kW (4.8 HP) / 3600 rpm

2.5 kW (3.4 HP) / 3000 rpm

2.9 kW (3.9 HP) / 3600 rpm



10.3 Nm / 1.05 kgfm / 2500 rpm

4.3 kW (5.8 HP) / 3600 rpm

3.3 kW (4.4 HP) / 3000 rpm

3.7 kW (5.0 HP) / 3600 rpm

12.4 Nm / 1.26 kgfm / 2500 rpm

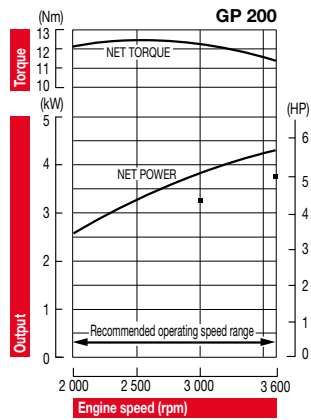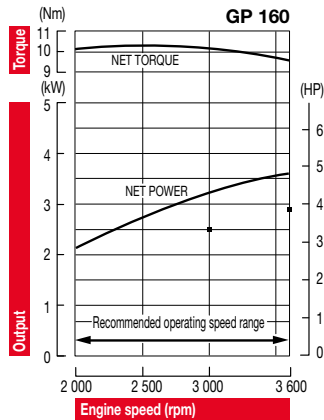

HONDA
The Power of Dreams



Ne**x**t-generation **GCVx**
SHAPED FOR THE FUTURE

A brand new state-of-the-art vertical shaft engine line-up

Incorporates Honda's latest technology features in order to meet market requirements today and in the future.
The perfect choice to power garden applications.



GCV_x145



GCV_x170



GCV_x200

- **Innovative styling**
- **First-class power & torque**
- **Full line-up**
- **Smart engine line-up**

www.honda-engines-eu.com

Specifications

GCVx145



4-stroke single cylinder
OHV petrol engine
vertical shaft

Aluminium cylinder

145 cm³

1.1 L/h - 3000 rpm

415 x 330 x 359 mm

10.1 kg

GCVx170



4-stroke single cylinder
OHV petrol engine
vertical shaft

Aluminium cylinder

166 cm³

1.2 L/h - 3000 rpm

415 x 330 x 359 mm

10.1 kg

GCVx200



4-stroke single cylinder
OHV petrol engine
vertical shaft

Aluminium cylinder

201 cm³

1.4 L/h - 3000 rpm

415 x 330 x 359 mm

10.1 kg

Engine type

Cylinder sleeve type

Displacement

**Fuel cons. at cont.
rated power**

Dimensions (L x W x H)

Dry weight

Net power

3.1 kW (4.2 HP) / 3600 rpm

3.6 kW (4.8 HP) / 3600 rpm

4.2 kW (5.6 HP) / 3600 rpm

Cont. rated power

2.1 kW (2.8 HP) / 3000 rpm

2.4 kW (3.2 HP) / 3000 rpm

2.8 kW (3.8 HP) / 3000 rpm




Max. net torque

9.1 Nm / 0.93 kgfm / 2500 rpm

11.1 Nm / 1.13 kgfm / 2500 rpm

12.7 Nm / 1.30 kgfm / 2500 rpm

Power curve

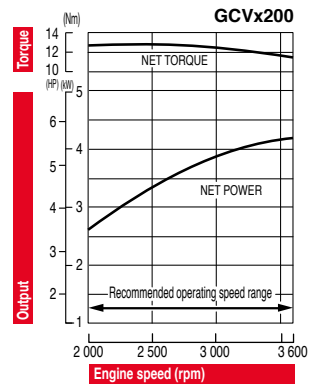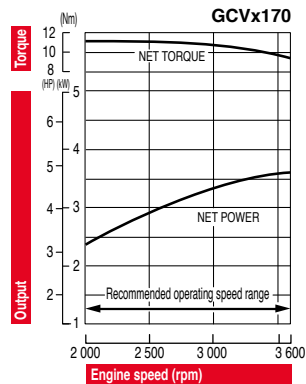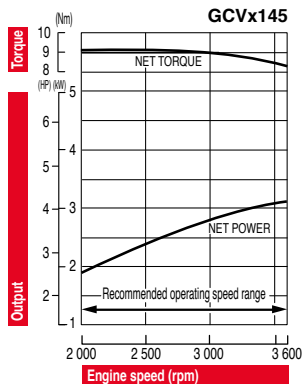

GCVx

Specifications

GX25



4-stroke single cylinder
OHC petrol engine

Aluminium cylinder

25 cm³

0.54 L/h - 7000 rpm

192 x 221 x 230 mm

2.78 kg

GX35



4-stroke single cylinder
OHC petrol engine

Aluminium cylinder

35.8 cm³

0.71 L/h - 7000 rpm

198 x 234 x 240 mm

3.33 kg

GX50



4-stroke single cylinder
OHC petrol engine

Aluminium cylinder

47.9 cm³

0.97 L/h - 7000 rpm

199 x 260 x 263 mm

4.13 kg

Engine type

Cylinder sleeve type

Displacement

**Fuel cons. at cont.
rated power**

Dimensions (L x W x H)

Dry weight

Net power

Max. net torque

0.72 kW (1.0 HP) / 7000 rpm

1.0 Nm / 0.10 kgfm / 5000 rpm




1.0 kW (1.3 HP) / 7000 rpm

1.6 Nm / 0.16 kgfm / 5500 rpm

1.47 kW (2.0 HP) / 7000 rpm

2.2 Nm / 0.22 kgfm / 5000 rpm

Power curve

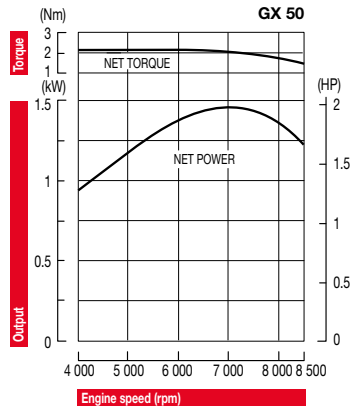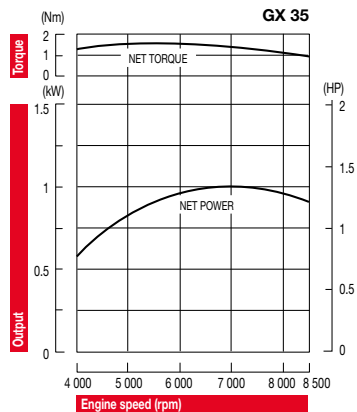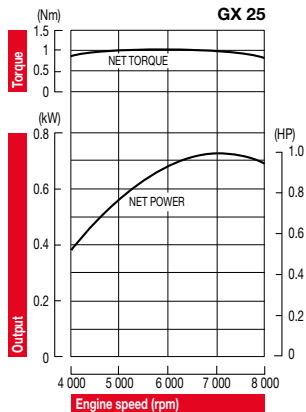

GX

Specifications

GX25 DIGITAL CDI*



4-stroke single cylinder
OHC petrol engine

Aluminium cylinder

25 cm³

0.4 L/h - 6000 rpm

236 x 210 x 192 mm

2.88 kg

GXV50



4-stroke single cylinder
OHV petrol engine
vertical shaft

Aluminium cylinder

49 cm³

0.91 L/h - 7000 rpm

247 x 286 x 225 mm

5.5 kg

GXV57



4-stroke single cylinder
OHV petrol engine
vertical shaft

Aluminium cylinder

57 cm³

0.58 L/h - 4600 rpm

249 x 286 x 240 mm

5.4 kg

Engine type

Cylinder sleeve type

Displacement

**Fuel cons. at cont.
rated power**

Dimensions (L x W x H)

Dry weight

Net power

Max. net torque

0.61 kW (0.82 HP) / 6000 rpm

1.0 Nm / 0.10 kgfm / 5000 rpm

1.6 kW (2.1 HP) / 7000 rpm




2.7 Nm / 0.28 kgfm / 4500 rpm

1.5 kW (2.0 HP) / 4800 rpm

3.2 Nm / 0.33 kgfm / 4000 rpm

*The digitally-controlled electronic ignition system (digital CDI) produces high power and low noise levels at lower speeds

Power curve

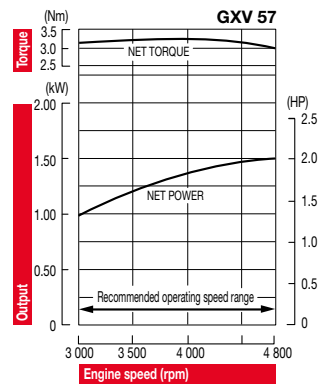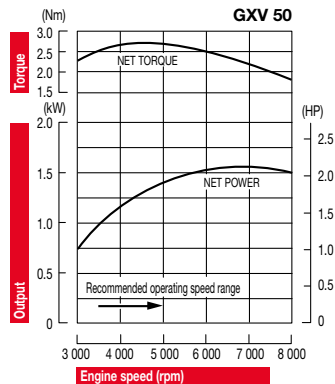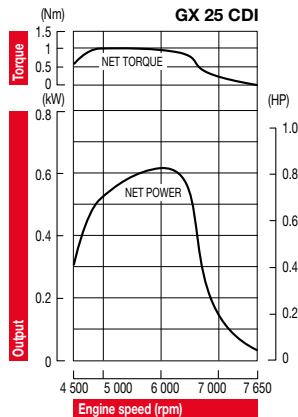

GX
GXV

Specifications

GXV160



4-stroke single cylinder
OHV petrol engine
vertical shaft

Cast iron sleeve

163 cm³

1.1 L/h - 3000 rpm

420 x 365 x 357 mm

15.5 kg

GXV390



4-stroke single cylinder
OHV petrol engine
vertical shaft

Cast iron sleeve

389 cm³

2.5 L/h - 3000 rpm

430 x 385 x 410 mm

33 kg

Engine type

Cylinder sleeve type

Displacement

Fuel cons. at cont.
rated power

Dimensions (L x W x H)

Dry weight

Net power

3.2 kW (4.3 HP) / 3600 rpm

7.6 kW (10.2 HP) / 3600 rpm

Cont. rated power

2.0 kW (2.7 HP) / 3000 rpm



5.2 kW (7.0 HP) / 3000 rpm

Max. net torque

9.6 Nm / 0.98 kgfm / 2500 rpm

24.2 Nm / 2.47 kgfm / 2500 rpm

Power curve

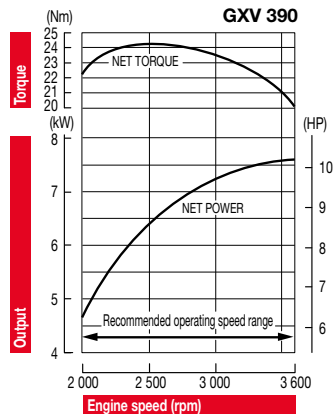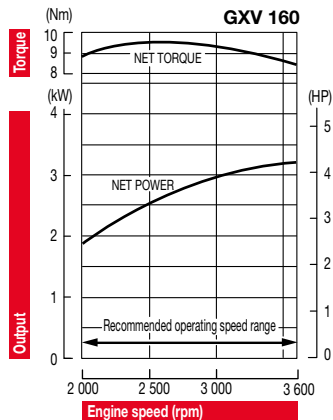

GXV

Specifications

GXV630



4-stroke 2-cylinder
OHV petrol engine
vertical shaft

Cast iron sleeve

688 cm³

5.0 L/h - 3000 rpm

443 x 420 x 475 mm

46.5 kg

GXV690



4-stroke 2-cylinder
OHV petrol engine
vertical shaft

Cast iron sleeve

688 cm³

5.7 L/h - 3000 rpm

443 x 420 x 492 mm (T-Type)

46.7 kg

Engine type

Cylinder sleeve type

Displacement

Fuel cons. at cont.
rated power

Dimensions (L x W x H)

Dry weight

Net power

15.5 kW (20.8 HP) / 3600 rpm

16.5 kW (22.1 HP) / 3600 rpm

Cont. rated power

10.5 kW (14.1 HP) / 3000 rpm



11.5 kW (15.4 HP) / 3000 rpm

Max. net torque

48.3 Nm / 4.93 kgfm / 2500 rpm

48.3 Nm / 4.93 kgfm / 2500 rpm

Power curve

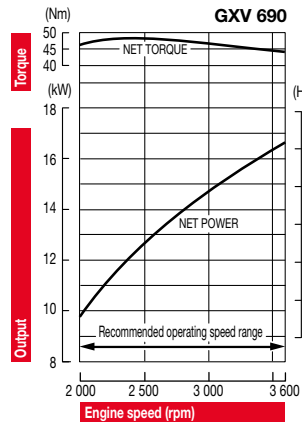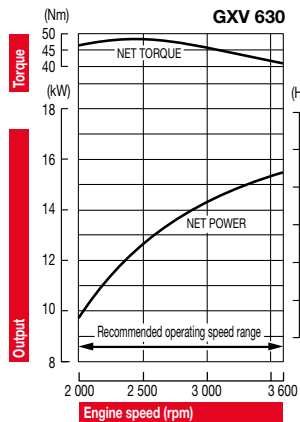

GXV

Specifications*

iG XV700



4-stroke 2-cylinder
OHV petrol engine
vertical shaft
Electronic fuel injection

Cast iron sleeve

688 cm³

6.5 L/h - 3600 rpm

443 x 493 x 512 mm (T-Type)

47.9 kg

iG XV800



4-stroke 2-cylinder
OHV petrol engine
vertical shaft
Electronic fuel injection

Cast iron sleeve

779 cm³

7.0 L/h - 3600 rpm

443 x 493 x 512 mm (T-Type)

48.6 kg

Engine type

Fuel system

Cylinder sleeve type

Displacement

Fuel cons. at cont.
rated power

Dimensions (L x W x H)

Dry weight

equipped with
STRTM GOVERNOR

Net power

Cont. rated power

Max. net torque

Power curve

16.5 kW (22.1 HP) / 3600 rpm

11.5 kW (15.4 HP) / 3000 rpm

13.0 kW (17.4 HP) / 3600 rpm



48.3 Nm / 4.93 kgfm / 2500 rpm

18.5 kW (24.8 HP) / 3600 rpm

13.3 kW (17.8 HP) / 3000 rpm

15.0 kW (20.1 HP) / 3600 rpm

54.5 Nm / 5.56 kgfm / 2500 rpm

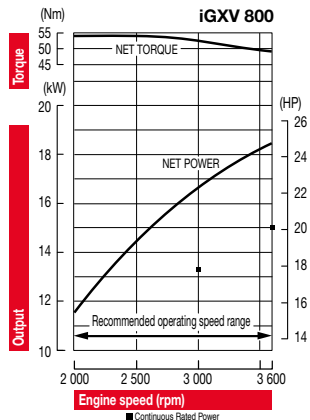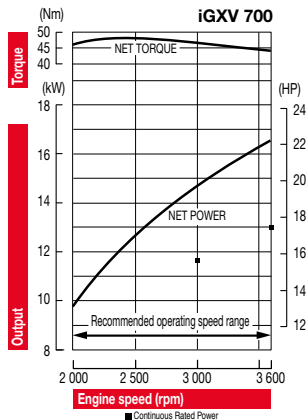

*subject to change

iGXV

Keep yourself...
... and your **Honda Engine**
100% happy

Honda Engines original spare parts
for better performance





At your service ...

Over 700 Honda Engine Specialists all over Europe for maintenance and repair of your Honda engine offering:



Repair
workshop



Warranty
handling



Spare parts
retail outlet



Replacement
engines

HONDA



ENGINE SERVICE

Visit our website www.honda-engines-eu.com and find your local Honda Engine Specialist, the correct spare parts for your engine at the online spare parts catalogue and much more information on the Honda engines.



uni-power

ENGINES • TRANSMISSIONS • PARTS

TEL: 01371 875331 www.uni-power.co.uk

Honda Engines – France

Honda Motor Europe Ltd Succursale France
Parc d'Activités de Pariest • Allée du 1^{er} Mai, BP 46
Croissy Beaubourg • F-77312 Marne-la-Vallée Cedex 2
TEL: + 33 (0)1 60 37 32 45

Honda Engines – Germany

Honda Deutschland Ndl. der HME Ltd.
Hanauer Landstraße 222-224 • D-60314 Frankfurt
TEL: + 49 (0) 69 8309 (0) 365

Honda Engines – Italy

Honda Motor Europe Logistics NV
Via Strà 153-154 • I-37030 Colognola ai Colli (VR)
TEL: + 39 045 6173341

Honda Engines – Russia

Representative office of Honda Motor Europe Logistics in Russia
Building 1, Pridorozhnaya Street, Sharapovo settlement, Marushkinsky District
108809 Moscow, Russian Federation
TEL: + 7 (495) 745 2080

Honda Engines – Sweden

Honda Motor Europe Ltd Filial Sverige
Box 31002 • SE-200 49 Malmö
TEL: + 46 40 38 07 18

Honda Engines – United Kingdom

Honda Motor Europe Logistics NV
Viscount Way, South Marston Park • Swindon SN3 4TN, UK
TEL: + 44 (0) 1455 559429



HONDA

Honda Motor Europe Logistics NV

Langerbruggestraat 104 • B-9000 Gent

TEL: + 32 (0)9 250 12 11

www.honda-engines-eu.com