

4TN107

New 4.6 liter, EU Stage V compliant, charged air cooler, two stage turbocharged, common rail engine peaks at **155kW** while developing a staggering **805Nm** of torque.

SINGLE TURBO

90kW / 1,800min⁻¹ **100kW** / 2,000min⁻¹ **110kW** / 2,200min⁻¹

2 STAGE TURBO

127kW / 1,800min⁻¹ **141kW** / 2,000min⁻¹ **155kW** / 2,200min⁻¹

155kW

4TN101

New 3.8 liter, EU Stage V compliant, charged air cooler, turbocharged, common rail engine peaks at **105kW** and **550Nm** of torque.

STANDARD OUTPUT

77kW / 2,000min⁻¹ **85kW** / 2,200min⁻¹ **85kW** / 2,400min⁻¹

HIGH OUTPUT

96kW / 2,000min⁻¹ **105kW** / 2,200min⁻¹



105kW

POWER UP



BEST CHOICE FOR OFF-ROAD



HIGH POWER
DENSITY: 34kW/L

BEST IN CLASS
10% LESS FUEL CONSUMPTION*


* BASED UPON THE COMPARISON OF AVERAGE INDUSTRY STANDARDS WITH OUR TEST RESULTS.

4TN107


SPECIFICATION

Model	4TN107 [Single Turbo]				4TN107 [2 Stage Turbo]		
Emission Compliance	EU Stage V / EPA Final Tier4						
Aspiration	Single T/C CAC				Two Stage T/C CAC		
Fuel Injection	Direct Injection (DI)						
Fuel Injection System	Common Rail						
EGR	Cooled EGR						
ATS	DOC + DPF + SCR						
No. of Cylinders	4						
Bore × Stroke	mm	107 × 127					
Displacement	L	4.6					
Rated Output	kW / min ⁻¹	90 / 1,800	100 / 2,000	110 / 2,200	127 / 1,800	141 / 2,000	155 / 2,200
Max. Torque	Nm / min ⁻¹	602 / 1,350	602 / 1,500	602 / 1,500	805 / 1,350	805 / 1,500	805 / 1,500
Low-speed Torque	Nm / min ⁻¹	460 / 1,000			604 / 1,000		
Overall Length × Width × Height	mm	940 × 650 × 940 (w/o ATS)			940 × 730 × 940 (w/o ATS)		
Weight (Dry)	kg	540 (w/o FAN, ATS)			550 (w/o FAN, ATS)		

PERFORMANCE CURVES

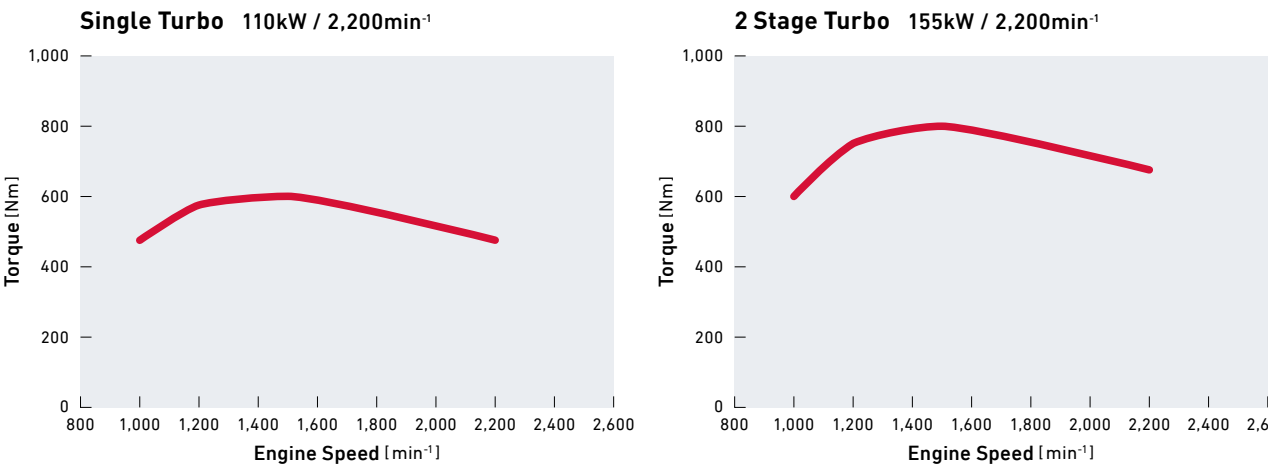

DIMENSIONS (unit: mm)

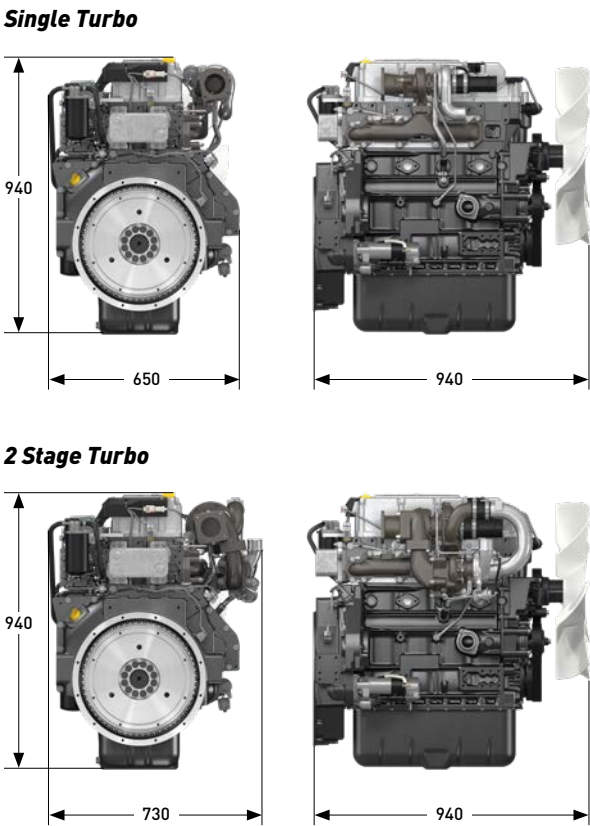


4TN101


SPECIFICATION

Model	4TN101 [Standard Output]				4TN101 [High Output]	
Emission Compliance	EU Stage V / EPA Final Tier4					
Aspiration	T/C CAC					
Fuel Injection	Direct Injection (DI)					
Fuel Injection System	Common Rail					
EGR	Cooled EGR					
ATS	DOC + DPF + SCR					
No. of Cylinders	4					
Bore × Stroke	mm	101 × 120				
Displacement	L	3.8				
Rated Output	kW / min ⁻¹	77 / 2,000	85 / 2,200	85 / 2,400	96 / 2,000	105 / 2,200
Max. Torque	Nm / min ⁻¹	445 / 1,500			550 / 1,500	
Low-speed Torque	Nm / min ⁻¹	370 / 1,000			455 / 1,000	
Overall Length × Width × Height	mm	890 × 630 × 870 (w/o ATS)				
Weight (Dry)	kg	420 (w/o FAN, ATS)				

PERFORMANCE CURVES

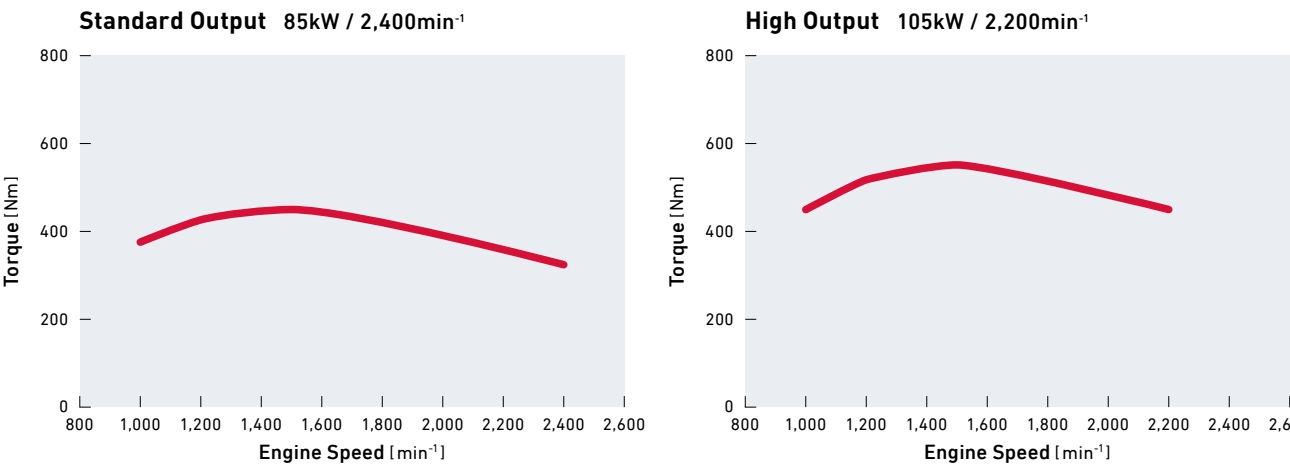

DIMENSIONS (unit: mm)

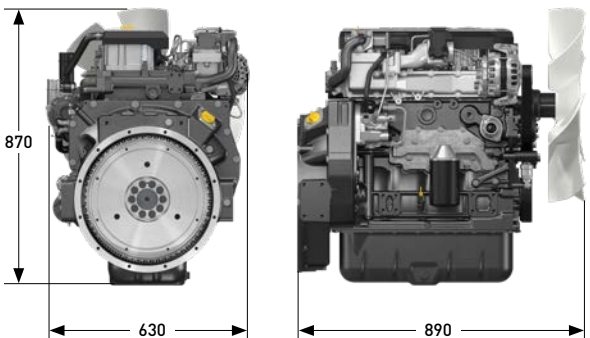

REGIONAL HEADQUARTERS

Yanmar Europe B.V.
Brugplein 11
1332 BS Almere
The Netherlands
+31 (0)36 549 3200
yanmarpowerup.eu
yanmarindustrial.eu

Specification is subject to change without any notice.
DPF: Filter device designed to remove particulate matter (PM) from exhaust gas.
CAC: Charged Air Cooler.